

»Gases right? Package tight?«

[MARTIN BENDER: GENERAL MANAGER SALES & INNOVATION – WITT-GASETECHNIK]

Focus on freshness
guarantee – with
gas analysers from WITT.
Keyword: HACCP



reddot design award
winner 2009



OXYBABY® 6.0

**Cordless hand held gas analyser
for mobile sample testing of O₂, CO₂
or O₂ and CO₂**

1 Graphic display

- Results in 0.1 % steps
 - Illuminated LCD display
- Displayed information:*
- Results O₂/CO₂
 - Product name
 - Date/time of last measurement
 - Charging status
 - Memory status
 - Sample-hold or permanent measurement



2 One-hand operation

- Ergonomic design
- Ready for operation immediately
- Calibration at the push of a button

3 Integrated pressure compensation

- Compensates for air pressure fluctuations

4 Automatic measuring after needle insertion

- Result in 6 seconds
- Sample flow control
- Needle cover to protect needle and user

5 Integrated micro gas pump

6 USB interface

- Data transfer
- Charging

7 Micro SD card

- Data log
- Software upgrades

8 Synthetic body

- Easy to clean
- Shock resistant

9 Integrated hydrophobic filter

- Protection against impurities and moisture

**One-hand operation
with data log**



INCLUDED IN DELIVERY

Complete in carrying case with:

- Charging device
- 2 spare needles
- 2 spare filters
- Set of 100 patches
- Case dimensions (H x W x D): approx. 325 x 385 x 115 mm (12.79 x 15.16 x 4.53 inch)
- Case weight: approx. 1.7 kg (3.75 lbs) incl. contents
- Detailed documentation (CD-ROM)

Options (OXYBABY® 6.0 only):

- GAS CONTROL CENTRE software
- Barcode-Reader
- Bluetooth (e.g. for separate printer)
- Separate printer
- Data cable

Portable
mini-printer



FUNCTIONS

OXYBABY® 6.0 is a cost effective alternative to tabletop analysers for checking modified atmosphere packaging (MAP) – for example in line with a HACCP system. Due to its minimum sample gas requirements the OXYBABY® allows even the smallest of modified atmosphere packages to be tested.

The cordless, easily manageable analyser provides accurate and quick data. A special highlight to avoid wrong results: the permanent flow control with automatic alarm in the event of needle or filter blockage.

The high performance device allows the administration of up to 25 users and the classification of results for up to 100 product names and 50 packaging lines. Via the optional integrated barcode reader the user and product data can easily be read.

The OXYBABY® 6.0 is the perfect tool for fast and exact sample testing of O₂/CO₂ directly at the packaging machine, in stores and in the laboratory. Wherever results have to be recorded this ergonomic analyser can be used. The optional Bluetooth interface offers all benefits of modern technology – wireless communication, fast and easy. For example to connect a printer.

The large data storage logs the last 500 results and allows long export intervals. In combination with the WITT software solution GAS CONTROL CENTER all results can be analysed and documented on a PC. The data transfer is realised via USB port.

With this full documentation you can guarantee highest packaging quality and optimal freshness to your customers.

CONCLUSION

The OXYBABY® from WITT – your perfect companion for mobile sample testing of food packages.

BENEFITS

- For the smallest of packs – minimum sample gas required (< 4 ml)
- Fast test – result in 6 seconds
- No incorrect results – flow control with alarm
- Easy to use with one-hand operation and intuitive menu
- All information at a glance via the large, illuminated graphic display
- Cordless operation using rechargeable batteries
- No need to hand write results – full digital documentation
- Integrated data log of the last 500 measurements
- Hygienic, easy to clean synthetic body
- USB port
- Just one device for many applications – Administration of up to 25 users and management of results for up to 100 products and 50 packaging lines
- Multilingual menu guide (D, UK, F, I, NL, S, FIN, E, PL, RUS, JP, CN, H, TR)

Options:

- Wireless communication via Bluetooth (e. g. for connection of a separate printer)
- Barcode reader to import product and user data
- Version for pressurised sample gas with pressure controller
- Documented results with WITT GAS CONTROL CENTER software
- Equipment for headspace analysis in cans/bottles

OXYBABY® M+

The basic model as a cost effective alternative



BENEFITS

- Proven one-hand operation with rechargeable battery
- Measuring time 10 seconds
- Intuitive keypad for easy handling
- Compact display
- Data log of 100 results

Options:

- Equipment for headspace analysis in cans/bottles
- Version for pressurised sample gas with pressure controller

MAPY 4.0

The multi-functional premium gas analyser for guaranteed quality and control



reddot design award winner 2009

1 Shapely, ergonomic design

- „red dot Award“ 2009
- Inclined display

2 Touch-screen

- Intuitive data and parameter entry
- No skilled personnel needed
- 5.7" LCD display
- 256 colours
- Resolution: 320 x 240 pixel

3 Stainless steel housing

- Easy to clean
- Splash proof

4 Needle

- Flow control with alarm
- Needle protector



Multi-functional with touch-screen



MAPY 4.0 as 19" input module



MAPY 4.0 with integrated printer

5 Handhold

- For mobile use

6 USB connection

- Data transfer or software update via USB stick

7 Ethernet interface

- Integration into company network
- Comfortable data administration and analysis
- Customer oriented quality documentation

8 Serial interface

9 Potential-free contact

10 Analogue output

11 Gas outlet

12 Gas inlet

13 Sensor

14 Integrated audible alarm



FUNCTIONS

The new, shapely, multifunctional analyser MAPY 4.0 is WITT's top model for checking of modified atmosphere packaging (MAP). The portable device sets standards in quality control regarding the combination of visual appearance, ergonomics and functionality and has won the "red dot award" 2009 for outstanding product design.

The new touch-screen as the central control element allows intuitive handling and provides optimal information. The MAPY 4.0 can be used for continuous analysis or intermittent sampling via a needle. Fast and reliable measurements and automatic alarm functionality if limits are exceeded assure quality and economy in production.


Different types of sensors are available depending on the type of gas – CO₂, O₂ or helium. The product portfolio contains chemical, paramagnetic, infrared or thermal measuring sensors. Also a new zirconia measuring cell for precise results in ppm is available.

High-class components and the robust stainless steel design guarantee long service life and meet the high hygiene requirements in the food industry. Various interfaces (Ethernet, USB, barcode reader, printer) allow easy and flexible integration into existing systems. Exported data can be analysed and documented with the optional WITT software GAS CONTROL CENTER.

Guarantee optimal freshness with full digital documentation and ensure long-lasting supply relationships.

CONCLUSION

MAPY 4.0 by WITT – the top model for gas analysis of food packages.

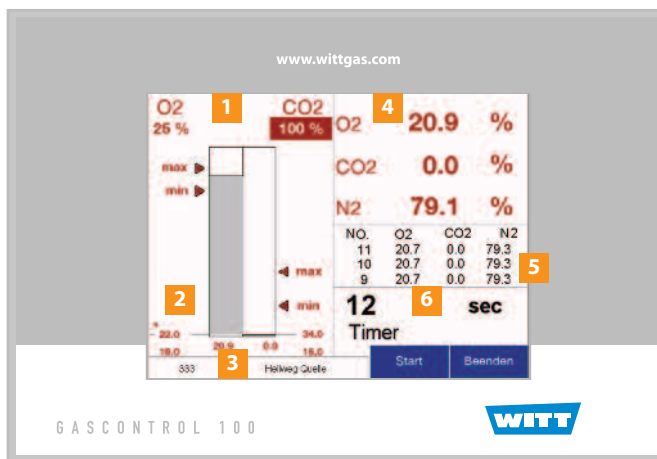

USER INTERFACE

- 1 Grafical display of results
- 2 Numeric display of results
- 3 Sensor status
- 4 Product name and product number
- 5 Results of the last three measurements
- 6 Selectable measuring mode
 - Permanent
 - Countdown measuring
 - Manual setting of measuring time

BENEFITS

- For the smallest of packs – minimum sample gas required
- Short measuring time
- High accuracy down to ppm – different measuring methods depending on application
- Reliability – flow control with alarm function
- High process safety by permanent system check with alarm function
- Reliable steady measuring results by pressure compensation
- Data logging of thousands of results
- No skilled personnel required – colour touch screen for intuitive use
- Administration of up to 60 users with individual rights and full documentation
- Management of results and individual limit values for up to 1,000 products
- Customer-oriented quality control – data transfer via Ethernet or USB stick
- Manual measuring or automatic measuring
- Display of up to three gases
- Simple calibration of sensor
- Maximum hygiene – Easy to clean stainless steel housing

Options:

- Different versions: sample testing, permanent control and for pressurised sample gas with pressure controller
- Also for additional gases
- Easy product selection with barcode reader
- Integrated printer
- As 19" rack version
- GAS CONTROL CENTER software for data administration



(for more information please see following page)

PA series

The compact gas analyser for fast measuring of O₂, CO₂ or O₂ and O₂/CO₂

Versatile
and economic



- 1 Graphic display**
 - Results in 0.1 % steps
 - Illuminated LCD display
 - Displayed information:*
 - Results O₂ / CO₂
 - Product name
 - Date/time of last measurement
 - Charging status
 - Memory status
 - Sample-hold or permanent measurement
 - With upright or inclined front
- 2 Easy cleaning**
- 3 Stainless steel housing**
- 4 Needle for sample testing**
- 5 Easy, intuitive use**
 - No skilled personnel required
- 6 USB interface**
 - Data transfer
 - Charging
- 7 Micro SD card**
 - Data log
 - Software upgrades

FUNCTIONS

The modified atmosphere in food packages needs regular monitoring during the packaging process to guarantee freshness of food.

For best quality and efficiency in production. The compact gas analyser PA enables the testing of O₂ / CO₂ for modified atmosphere packaging. Wherever results have to be recorded this comfortable analyser can be used. This can be done as intermittent sampling via a needle or as continuous in-line analysis. Depending on the type of gas and analysis the PA contains a chemical, a zirconia and / or an infrared measuring cell.

The PA has an integrated data log for the last 500 results, which relate to specific product names.

Results can be transferred to a PC for editing and analysing, e. g. with the WITT GAS CONTROL CENTER software.

CONCLUSION

The PA by WITT – the economic analyser series.

GAS CONTROL CENTER

PROD_NAME	DATE	TIME	O2	CO2	TEMP	PH	PH2O	REL_H2O	PH2O	MOISTURE	MOISTURE	MOISTURE
123456789	12.10.2010	10:00:00	12.10.2010	10:00:00	0	15.000	1.75	20.00	1.75	20.00	1.75	20.00
123456789	12.10.2010	10:01:00	12.10.2010	10:01:00	0	15.000	1.75	20.00	1.75	20.00	1.75	20.00
123456789	12.10.2010	10:02:00	12.10.2010	10:02:00	0	15.000	1.75	20.00	1.75	20.00	1.75	20.00
123456789	12.10.2010	10:03:00	12.10.2010	10:03:00	0	15.000	1.75	20.00	1.75	20.00	1.75	20.00
123456789	12.10.2010	10:04:00	12.10.2010	10:04:00	0	15.000	1.75	20.00	1.75	20.00	1.75	20.00
123456789	12.10.2010	10:05:00	12.10.2010	10:05:00	0	15.000	1.75	20.00	1.75	20.00	1.75	20.00
123456789	12.10.2010	10:06:00	12.10.2010	10:06:00	0	15.000	1.75	20.00	1.75	20.00	1.75	20.00
123456789	12.10.2010	10:07:00	12.10.2010	10:07:00	0	15.000	1.75	20.00	1.75	20.00	1.75	20.00
123456789	12.10.2010	10:08:00	12.10.2010	10:08:00	0	15.000	1.75	20.00	1.75	20.00	1.75	20.00
123456789	12.10.2010	10:09:00	12.10.2010	10:09:00	0	15.000	1.75	20.00	1.75	20.00	1.75	20.00
123456789	12.10.2010	10:10:00	12.10.2010	10:10:00	0	15.000	1.75	20.00	1.75	20.00	1.75	20.00
123456789	12.10.2010	10:11:00	12.10.2010	10:11:00	0	15.000	1.75	20.00	1.75	20.00	1.75	20.00
123456789	12.10.2010	10:12:00	12.10.2010	10:12:00	0	15.000	1.75	20.00	1.75	20.00	1.75	20.00
123456789	12.10.2010	10:13:00	12.10.2010	10:13:00	0	15.000	1.75	20.00	1.75	20.00	1.75	20.00
123456789	12.10.2010	10:14:00	12.10.2010	10:14:00	0	15.000	1.75	20.00	1.75	20.00	1.75	20.00
123456789	12.10.2010	10:15:00	12.10.2010	10:15:00	0	15.000	1.75	20.00	1.75	20.00	1.75	20.00
123456789	12.10.2010	10:16:00	12.10.2010	10:16:00	0	15.000	1.75	20.00	1.75	20.00	1.75	20.00
123456789	12.10.2010	10:17:00	12.10.2010	10:17:00	0	15.000	1.75	20.00	1.75	20.00	1.75	20.00
123456789	12.10.2010	10:18:00	12.10.2010	10:18:00	0	15.000	1.75	20.00	1.75	20.00	1.75	20.00
123456789	12.10.2010	10:19:00	12.10.2010	10:19:00	0	15.000	1.75	20.00	1.75	20.00	1.75	20.00
123456789	12.10.2010	10:20:00	12.10.2010	10:20:00	0	15.000	1.75	20.00	1.75	20.00	1.75	20.00
123456789	12.10.2010	10:21:00	12.10.2010	10:21:00	0	15.000	1.75	20.00	1.75	20.00	1.75	20.00
123456789	12.10.2010	10:22:00	12.10.2010	10:22:00	0	15.000	1.75	20.00	1.75	20.00	1.75	20.00
123456789	12.10.2010	10:23:00	12.10.2010	10:23:00	0	15.000	1.75	20.00	1.75	20.00	1.75	20.00
123456789	12.10.2010	10:24:00	12.10.2010	10:24:00	0	15.000	1.75	20.00	1.75	20.00	1.75	20.00
123456789	12.10.2010	10:25:00	12.10.2010	10:25:00	0	15.000	1.75	20.00	1.75	20.00	1.75	20.00
123456789	12.10.2010	10:26:00	12.10.2010	10:26:00	0	15.000	1.75	20.00	1.75	20.00	1.75	20.00
123456789	12.10.2010	10:27:00	12.10.2010	10:27:00	0	15.000	1.75	20.00	1.75	20.00	1.75	20.00
123456789	12.10.2010	10:28:00	12.10.2010	10:28:00	0	15.000	1.75	20.00	1.75	20.00	1.75	20.00
123456789	12.10.2010	10:29:00	12.10.2010	10:29:00	0	15.000	1.75	20.00	1.75	20.00	1.75	20.00
123456789	12.10.2010	10:30:00	12.10.2010	10:30:00	0	15.000	1.75	20.00	1.75	20.00	1.75	20.00

FUNCTIONS

For presenting of test results to your customers at any time WITT offers a Windows based software package for result documentation. The data administration is ensured be it for MAPY, OXYBABY®, PA or other WITT devices.

Giving full digital documentation of your quality control you can guarantee highest product quality to your customers.

CONCLUSION

The WITT GAS CONTROL CENTER software is the perfect companion for WITT analysers. It offers full well presented documentation of your quality control results.

BENEFITS

- Compact design
- No skilled personnel required – intuitive use
- For the smallest of packs – minimum sample gas required
- Fast and precise results
- Versatile use – permanent monitoring or sample testing
- Logging of the last 500 results
- Individual limit values with relay contacts and alarm
- Maximum hygiene by easy-to-clean, robust and splash proof housing
- Interface for data exchange
- With upright or inclined front
- Multilingual menu guide (D, UK, F, I, NL, S, FIN, E, PL, RUS, JP, CN, H, TR)
- Different versions: sample testing, permanent control and for pressurised sample gas with pressure controller

BENEFITS

- Result documentation with date and time for quality management
- Individual, product-related data administration of: item number, batch number, product name, test results, name of tester
- Data exchange interface for transfer to MS-EXCEL
- For up to eight devices simultaneously
- Multilingual menu
- Automatic recognition of WITT devices

OUR PRODUCT RANGE

Gas Control Equipment

- Gas mixing systems
- Gas metering systems
- Gas analysers
- Leak detection systems
- Gas pressure vessels
- Engineering of customised systems

Gas Safety Equipment

- Flashback arrestors
- Non-return valves/check valves
- Quick couplers
- Safety relief valves
- Stainless steel devices
- Gas filters
- Pressure regulators
- Lance holders
- Ball valves
- Automatic hose reels
- Test equipment
- Accessories
- Customised safety equipment

WITT-Gasetechnik GmbH & Co KG

Salinger Feld 4-8 • D-58454 Witten
POB 2550 • D-58415 Witten
Germany
Tel. +49 (0)2302 8901-0
Fax +49 (0)2302 8901-3
www.wittgas.com • witt@wittgas.com

WITT Gas Controls LP

380 Winkler Drive, STE 200
Alpharetta, GA. 29004
USA
Tel. +1 888 948 8427
Fax +1 877 948 8427
witt-usa@wittgas.com

WITT Gas Techniques Ltd.

212, Europa Boulevard Westbrook
GB-Warrington, WA5 7TN
Great Britain
Tel. +44 (0)1925 234466
Fax +44 (0)1925 230055
witt-uk@wittgas.com

WITT POLSKA Sp. z o. o.

ul. Legnicka 62
PL-54-204 Wrocław
Polska
Tel. +48 (0)7135 22856/7
Fax +48 (0)7135 13113
witt-polska@wittgas.com

WITT FRANCE S.A.R.L.

131 Voie de Compiègne
F-91390 Morsang sur Orge
France
Tel. +33 (0)160 151779
Fax +33 (0)160 154782
witt-france@wittgas.com

WITT ITALIA Srl.

Via Giovanni XXIII, 18
I-24030 Solza (BG)
Italia
Tel. +39 035 4933273
Fax +39 035 4948098
witt-italia@wittgas.com

WITT Tecnología de Gas, S.L.

C/Simon Cabarga N° 2a
39005 Santander
España
Tel. +34 942 835142
Fax +34 942 835143
witt-espana@wittgas.com

GUSTUS & PARTNER GmbH

Installation – Service – Wartung
Alt Salbke 6-10, Geb. 59
D-39122 Magdeburg
Germany
Tel. +49 (0)391 4015246
Fax +49 (0)391 4013296
gustus@wittgas.com

Please contact us for partners in your country

Always up to date. Subscribe now. www.wittgas.com/newsletter_en



217142066
217145674
info@ert.pt
www.ERT.pt

Rua Soeiro Pereira Gomes, Lote 5, Cave Drt.
P2845-387 Amora
Portugal